

feltdecor[®]
s.line

More than silent

PrintSlat Collection

www.feltdecor.eu

PRINTSLAT



Immerse yourself in the realm of an unparalleled acoustic experience, where harmonious sounds flow through space while noise fades away.

Feltdecor PrintSlat panels embody modernity and minimalism, perfectly blending with any interior. Their designer appearance adds a unique and stylish character, creating an enchanting atmosphere that captivates everyone.

Discover the countless possibilities of using our panels, which are a perfect fit for various spaces - offices, luxurious hotels, and your own home. Whether it's the living room, bedroom, dining area, or hallway, these arrangements ensure a perfect match for every interior. Their exceptional acoustic properties transport you to a world where echoes are reduced, noise is hushed, and sounds resonate clearly and distinctly. Experience perfect audio-wellness, where sound quality takes precedence.


You don't need to be an expert to enjoy this exceptional solution. The panels seamlessly connect, forming a cohesive composition, and installation is child's play. Simply apply adhesive, and you can revel in the magic of your space.

Discover how our acoustic panels are conquering the world, bringing elegance, style, and perfection to your interior.

PrintSlim



SL60_PrintSlim_GreyOak

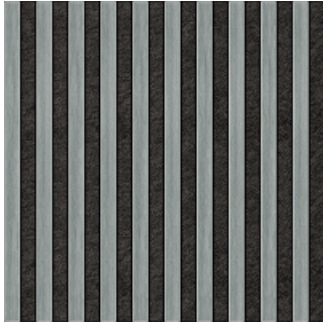

Base color:



RAVEN BLACK

Color of slats:



GREY OAK


PrintSlim

Composition:	100% poliester (at least 50% recycled)
Cutting method:	V-cut at 22.5 degrees
Edge:	V-cut at 22.5 degrees
Dimension:	600 x 600 mm
Thickness:	9 mm
Density:	1900 g/m ²


Sound absorption class:	PN-EN PN-EN ISO11654 $\alpha_w = 0,85$ Class B
Fire classification:	B-s1, d0 non-flammable
Color scheme:	UV print
Mounting method:	Wall mounting - adhesive mounting
Minimum logistics:	8 panels
Unit packaging:	Cardboard box with dimensions 600 x 660 x 80 mm.

Sample compositions PrintSlim GreyOak:

K_PS01_GO

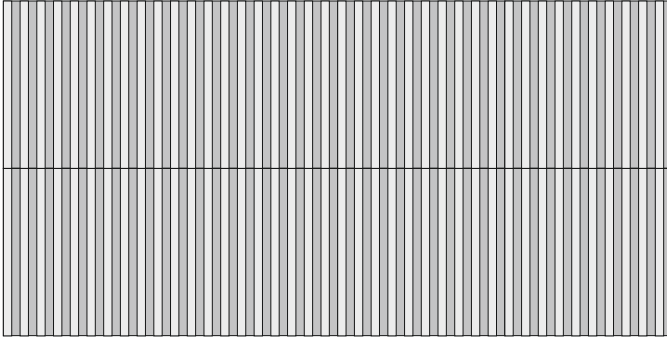


SL60_PrintSlim_GreyOak




8 SZTUK

K_PS02_GO

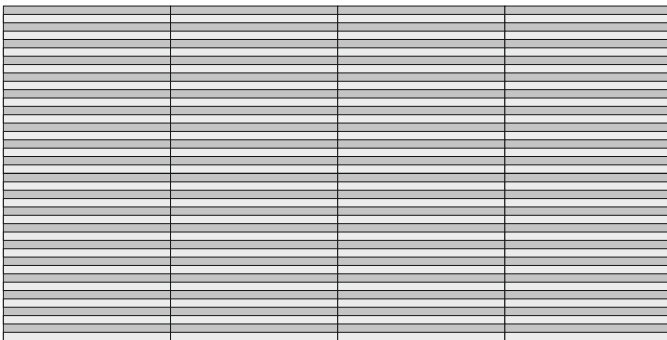


SL60_PrintSlim_GreyOak




8 SZTUK

K_PS03_GO

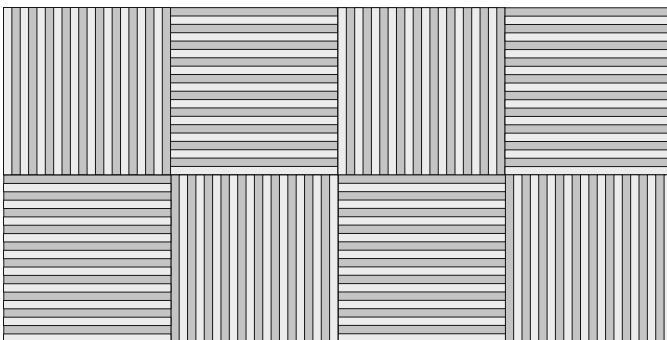

SL60_PrintSlim_GreyOak



8 SZTUK

PrintSlim



SL60_PrintSlim_RusticOak



Base color:



RAVEN BLACK

Color of slats:



RUSTIC OAK


PrintSlim

Composition:	100% poliester (at least 50% recycled)
Cutting method:	V-cut at 22.5 degrees
Edge:	V-cut at 22.5 degrees
Dimension:	600 x 600 mm
Thickness:	9 mm
Density:	1900 g/m ²


Sound absorption class:	PN-EN PN-EN ISO11654 $\alpha_w = 0,85$ Class B
Fire classification:	B-s1, d0 non-flammable
Color scheme:	UV print
Mounting method:	Wall mounting - adhesive mounting
Minimum logistics:	8 panels
Unit packaging:	Cardboard box with dimensions 600 x 660 x 80 mm.

Sample compositions PrintSlim RusticOak:

K_PS01_RO

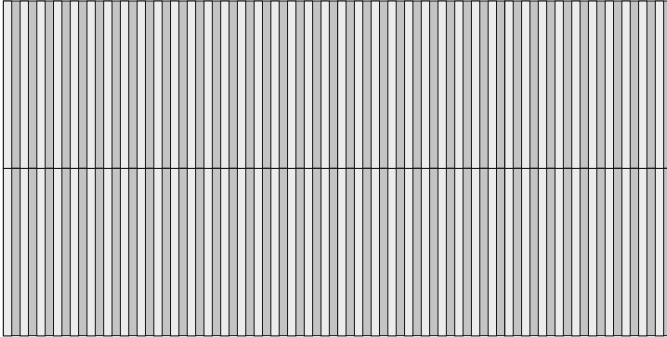


SL60_PrintSlim_RusticOak




8 PIECES

K_PS02_RO

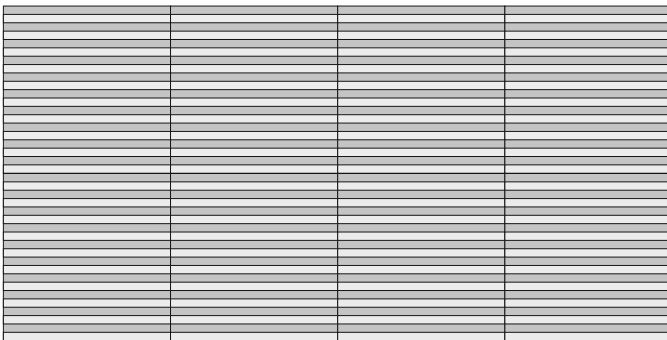


SL60_PrintSlim_RusticOak




8 PIECES

K_PS03_RO

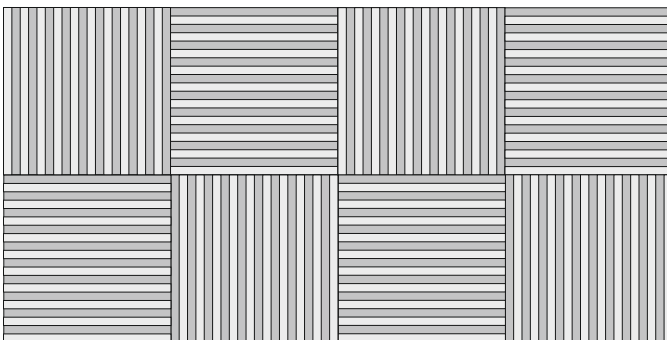

SL60_PrintSlim_RusticOak



8 PIECES

PrintSlim



SL60_PrintSlim_VintageOak



Base color:



RAVEN BLACK

Color of slats:



VINTAGE OAK


PrintSlim

Composition:	100% poliester (at least 50% recycled)
Cutting method:	V-cut at 22.5 degrees
Edge:	V-cut at 22.5 degrees
Dimension:	600 x 600 mm
Thickness:	9 mm
Density:	1900 g/m ²


Sound absorption class:	PN-EN PN-EN ISO11654 $\alpha_w = 0,85$ Class B
Fire classification:	B-s1, d0 non-flammable
Color scheme:	UV print
Mounting method:	Wall mounting - adhesive mounting
Minimum logistics:	8 panels
Unit packaging:	Cardboard box with dimensions 600 x 660 x 80 mm.

Sample compositions PrintSlim VintageOak:

K_PS01_V0

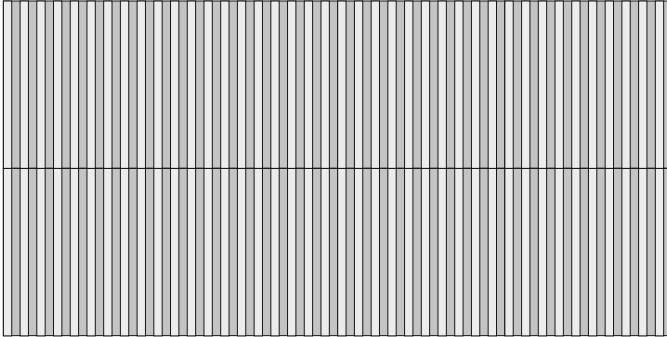


SL60_PrintSlim_VintageOak




8 PIECES

K_PS02_V0

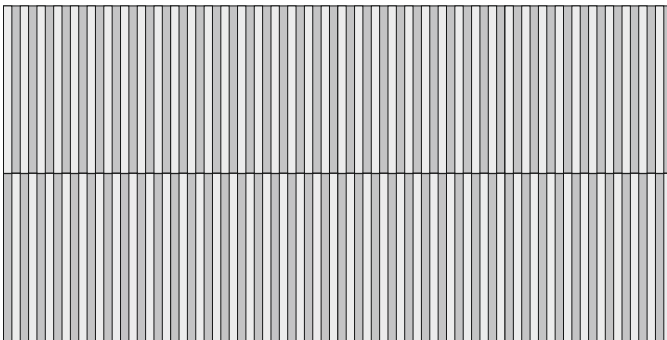


SL60_PrintSlim_VintageOak




8 PIECES

K_PS03_V0

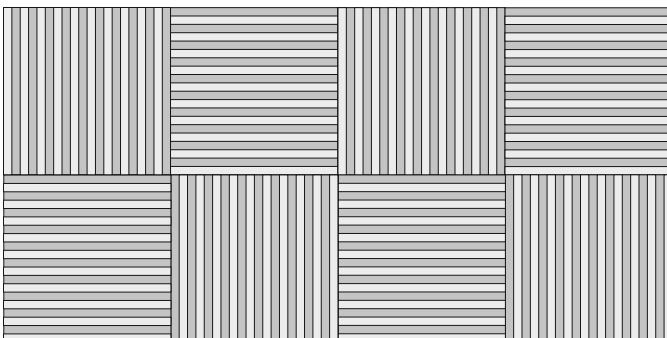

SL60_PrintSlim_VintageOak



8 PIECES

PrintEdge



SL60_PrintEdge_D_GreyOak



SL60_PrintEdge_G_GreyOak



Base color:



RAVEN BLACK

Color of slats:



GREY OAK


PrintEdge

Composition:	100% poliester (at least 50% recycled)
Cutting method:	V-cut at 22.5 degrees
Edge:	V-cut at 22.5 degrees
Dimension:	600 x 600 mm
Thickness:	9 mm
Density:	1900 g/m ²


Sound absorption class:	PN-EN PN-EN ISO11654 $\alpha_w = 0,85$ Class B
Fire classification:	B-s1, d0 non-flammable
Color scheme:	UV print
Mounting method:	Wall mounting - adhesive mounting
Minimum logistics:	8 panels
Unit packaging:	Cardboard box with dimensions 600 x 660 x 80 mm.

Sample compositions PrintEdge GreyOak:

K_PE01_GO

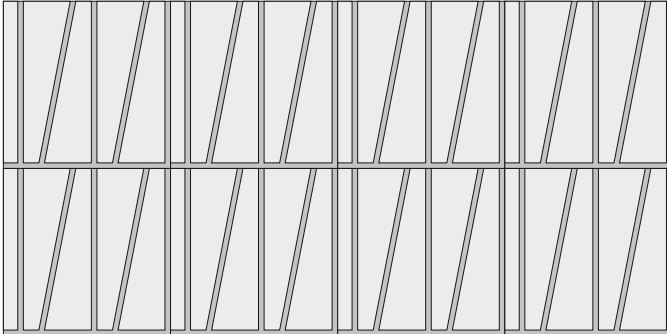


SL60_PrintEdge_G_GreyOak




8 PIECES

K_PE02_GO

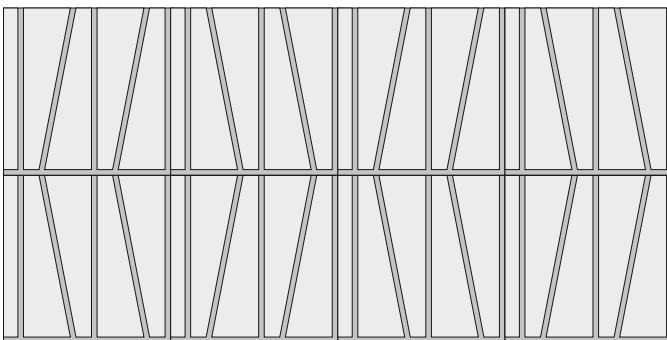


SL60_PrintEdge_D_GreyOak




4 PIECES

SL60_PrintEdge_G_GreyOak




4 PIECES

K_PE03_GO

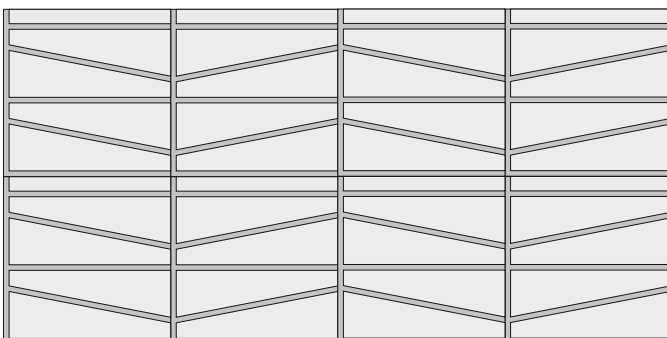


SL60_PrintEdge_D_GreyOak



4 PIECES

SL60_PrintEdge_G_GreyOak



4 PIECES

PrintEdge



SL60_PrintEdge_D_RusticOak



SL60_PrintEdge_G_RusticOak



Base color:



RAVEN BLACK

Color of slats:



RUSTIC OAK


PrintEdge

Composition:	100% poliester (at least 50% recycled)
Cutting method:	V-cut at 22.5 degrees
Edge:	V-cut at 22.5 degrees
Dimension:	600 x 600 mm
Thickness:	9 mm
Density:	1900 g/m ²


Sound absorption class:	PN-EN PN-EN ISO11654 $\alpha_w = 0,85$ Class B
Fire classification:	B-s1, d0 non-flammable
Color scheme:	UV print
Mounting method:	Wall mounting - adhesive mounting
Minimum logistics:	8 panels
Unit packaging:	Cardboard box with dimensions 600 x 660 x 80 mm.

Sample compositions PrintEdge RusticOak:

K_PE01_RO

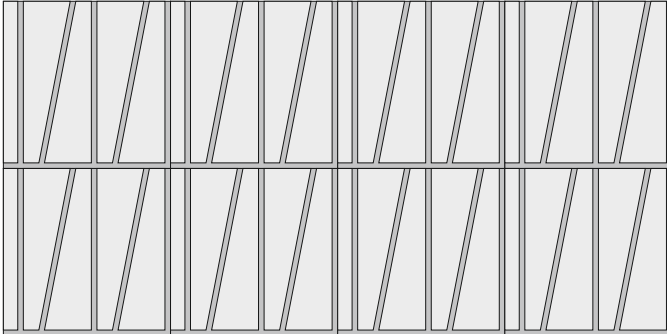


SL60_PrintEdge_G_RusticOak




8 PIECES

K_PE02_RO

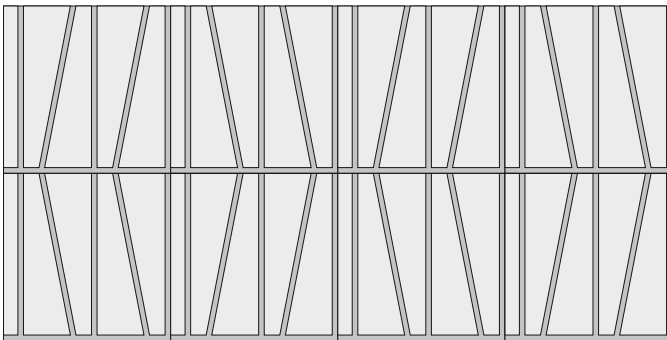


SL60_PrintEdge_D_RusticOak




4 PIECES

SL60_PrintEdge_G_RusticOak




4 PIECES

K_PE03_RO

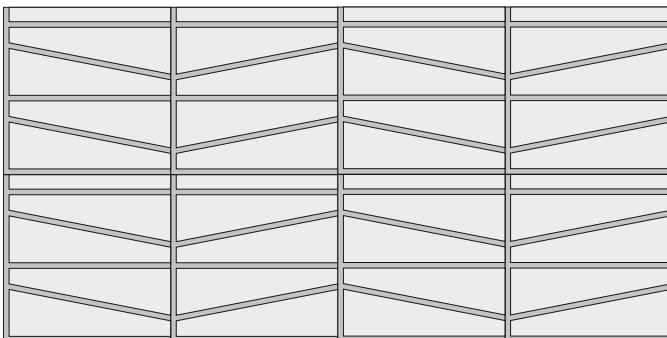


SL60_PrintEdge_D_RusticOak



4 PIECES

SL60_PrintEdge_G_RusticOak



4 PIECES

PrintEdge



SL60_PrintEdge_D_VintageOak



SL60_PrintEdge_G_VintageOak



Base color:



RAVEN BLACK

Color of slats:



VINTAGE OAK


PrintEdge

Composition:	100% poliester (at least 50% recycled)
Cutting method:	V-cut at 22.5 degrees
Edge:	V-cut at 22.5 degrees
Dimension:	600 x 600 mm
Thickness:	9 mm
Density:	1900 g/m ²


Sound absorption class:	PN-EN PN-EN ISO11654 $\alpha_w = 0,85$ Class B
Fire classification:	B-s1, d0 non-flammable
Color scheme:	UV print
Mounting method:	Wall mounting - adhesive mounting
Minimum logistics:	8 panels
Unit packaging:	Cardboard box with dimensions 600 x 660 x 80 mm.

Sample compositions PrintEdge VintageOak:

K_PE01_VO

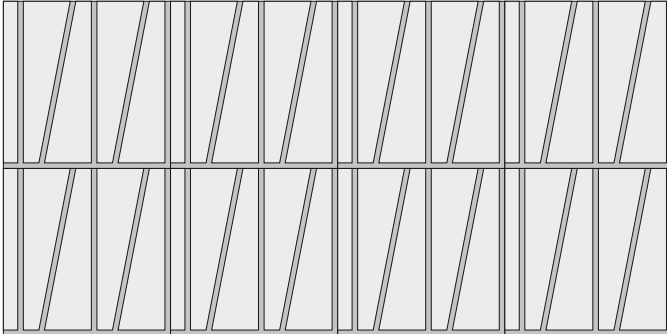


SL60_PrintEdge_G_VintageOak




8 PIECES

K_PE02_VO

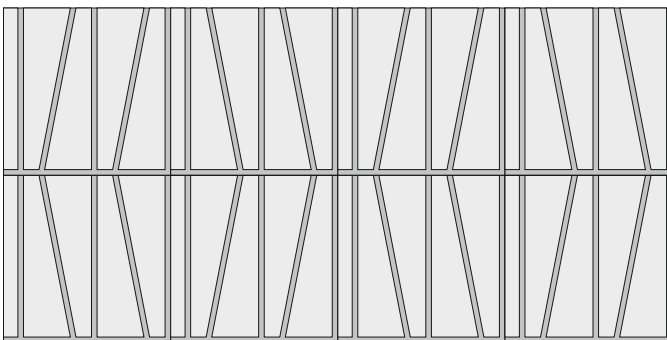


SL60_PrintEdge_D_VintageOak




4 PIECES

SL60_PrintEdge_G_VintageOak




4 PIECES

K_PE03_VO

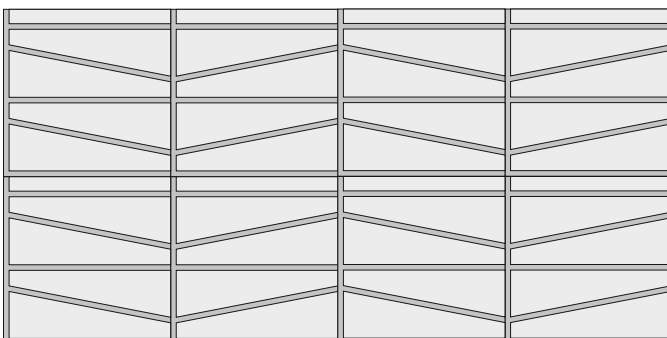


SL60_PrintEdge_D_VintageOak



4 PIECES

SL60_PrintEdge_G_VintageOak




4 PIECES


PrintShort



SL60_PrintShort_L_GreyOak

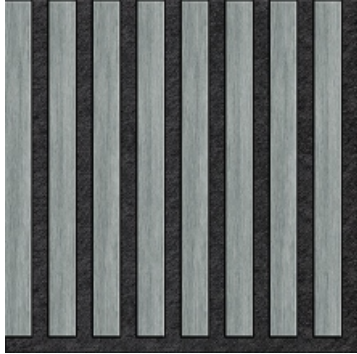

SL60_PrintShort_R_GreyOak

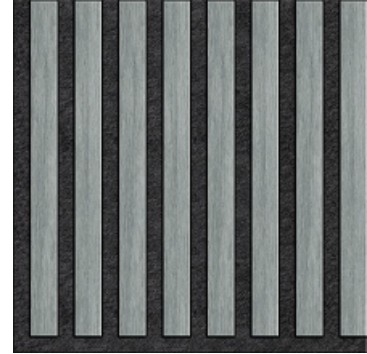


Base color:



RAVEN BLACK

Color of slats:



GREY OAK


PrintShort

Composition:	100% poliester (at least 50% recycled)
Cutting method:	V-cut at 22.5 degrees
Edge:	V-cut at 22.5 degrees
Dimension:	600 x 600 mm
Thickness:	9 mm
Density:	1900 g/m ²


Sound absorption class:	PN-EN PN-EN ISO11654 $\alpha_w = 0,85$ Class B
Fire classification:	B-s1, d0 non-flammable
Color scheme:	UV print
Mounting method:	Wall mounting - adhesive mounting
Minimum logistics:	8 panels
Unit packaging:	Cardboard box with dimensions 600 x 660 x 80 mm.

Sample compositions PrintShort GreyOak:

K_PSHS01_GO

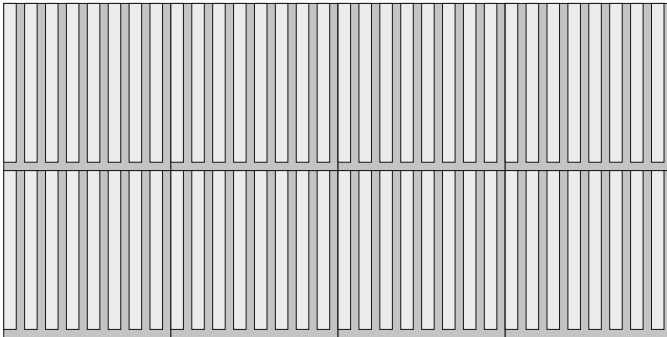


SL60_PrintShort_L_GreyOak




8 SZTUK

K_PSHS02_GO

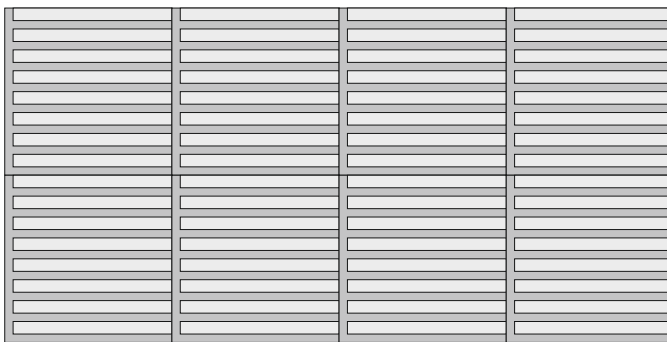


SL60_PrintShort_L_GreyOak




8 PIECES

K_PSHS03_GO

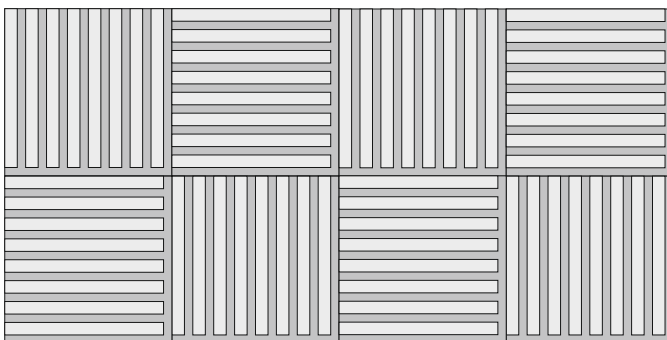


SL60_PrintShort_L_GreyOak



4 PIECES

SL60_PrintShort_R_GreyOak



4 PIECES

PrintShort



SL60_PrinShort_L_RusticOak



SL60_PrintShort_R_RusticOak



Base color:



RAVEN BLACK

Color of slats:



RUSTIC OAK


PrintShort

Composition:	100% poliester (at least 50% recycled)
Cutting method:	V-cut at 22.5 degrees
Edge:	V-cut at 22.5 degrees
Dimension:	600 x 600 mm
Thickness:	9 mm
Density:	1900 g/m ²


Sound absorption class:	PN-EN PN-EN ISO11654 $\alpha_w = 0,85$ Class B
Fire classification:	B-s1, d0 non-flammable
Color scheme:	UV print
Mounting method:	Wall mounting - adhesive mounting
Minimum logistics:	8 panels
Unit packaging:	Cardboard box with dimensions 600 x 660 x 80 mm.

Sample compositions PrintShort RusticOak:

K_PSHS01_RO

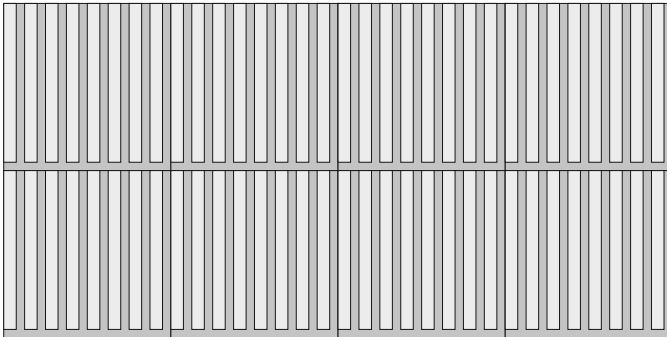


SL60_PrintShort_L_RusticOak




8 PIECES

K_PSHS02_RO

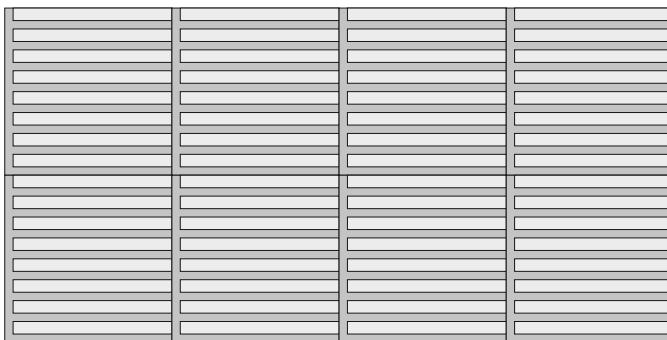


SL60_PrintShort_L_RusticOak




8 PIECES

K_PSHS03_RO

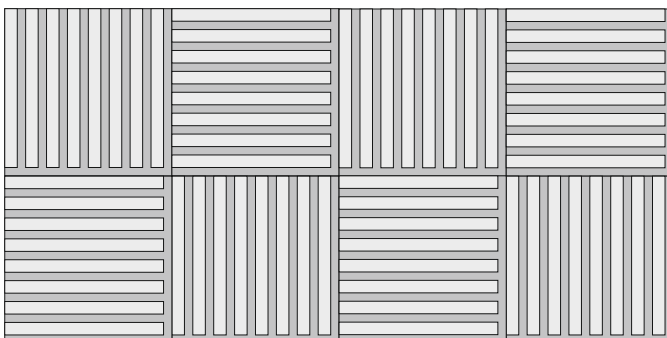


SL60_PrintShort_L_RusticOak



4 PIECES

SL60_PrintShort_R_RusticOak



4 PIECES

PrintShort



SL60_PrinShort_L_VintageOak



SL60_PrintShort_R_VintageOak



Base color:



RAVEN BLACK

Color of slats:



VINTAGE OAK


PrintShort

Composition:	100% poliester (at least 50% recycled)
Cutting method:	V-cut at 22.5 degrees
Edge:	V-cut at 22.5 degrees
Dimension:	600 x 600 mm
Thickness:	9 mm
Density:	1900 g/m ²


Sound absorption class:	PN-EN PN-EN ISO11654 $\alpha_w = 0,85$ Class B
Fire classification:	B-s1, d0 non-flammable
Color scheme:	UV print
Mounting method:	Wall mounting - adhesive mounting
Minimum logistics:	8 panels
Unit packaging:	Cardboard box with dimensions 600 x 660 x 80 mm.

Sample compositions PrintShort VintageOak:

K_PSHS01_V0

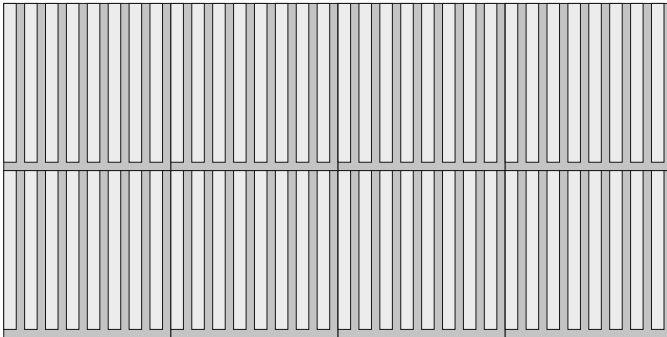


SL60_PrintShort_L_VintageOak




8 PIECES

K_PSHS02_V0

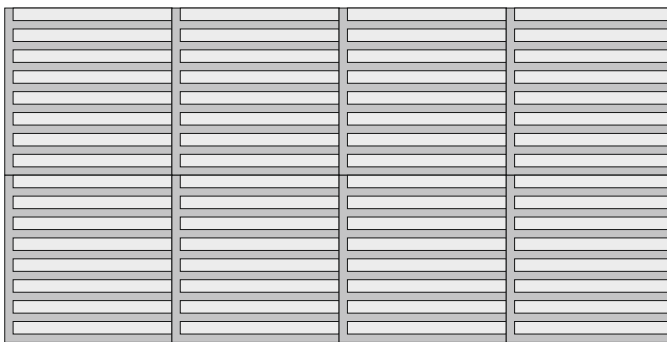


SL60_PrintShort_L_RusticOak




8 PIECES


K_PSHS03_V0

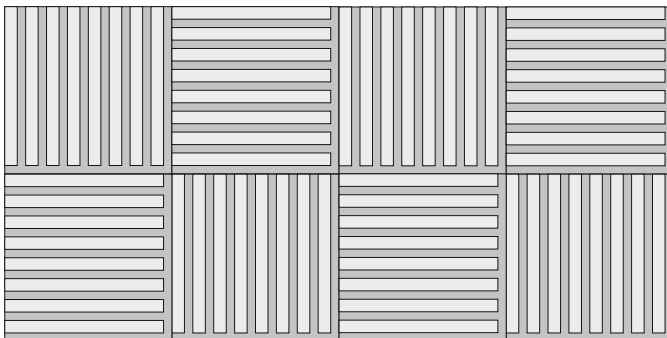

SL60_PrintShort_L_VintageOak SL60_PrintShort_R_VintageOak



4 PIECES




4 PIECES

PrintWide



SL60_PrintWide_GreyOak

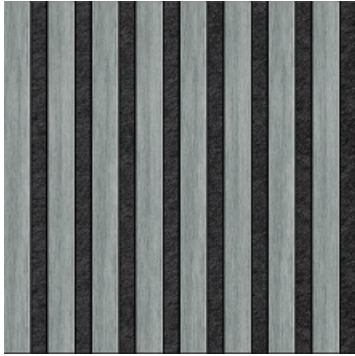


Base color:



RAVEN BLACK

Color of slats:



GREY OAK


PrintWide

Composition:	100% poliester (at least 50% recycled)
Cutting method:	V-cut at 22.5 degrees
Edge:	V-cut at 22.5 degrees
Dimension:	600 x 600 mm
Thickness:	9 mm
Density:	1900 g/m ²


Sound absorption class:	PN-EN PN-EN ISO11654 $\alpha_w = 0,85$ Class B
Fire classification:	B-s1, d0 non-flammable
Color scheme:	UV print
Mounting method:	Wall mounting - adhesive mounting
Minimum logistics:	8 panels
Unit packaging:	Cardboard box with dimensions 600 x 660 x 80 mm.

Sample compositions PrintWide GreyOak:

K_PW01_GO

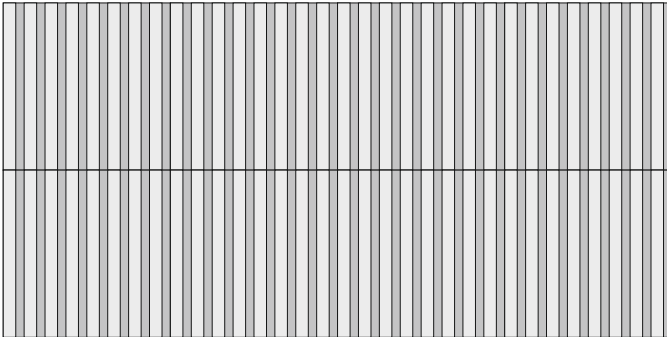


SL60_PrintWide_GreyOak




8 PIECES

K_WP02_GO

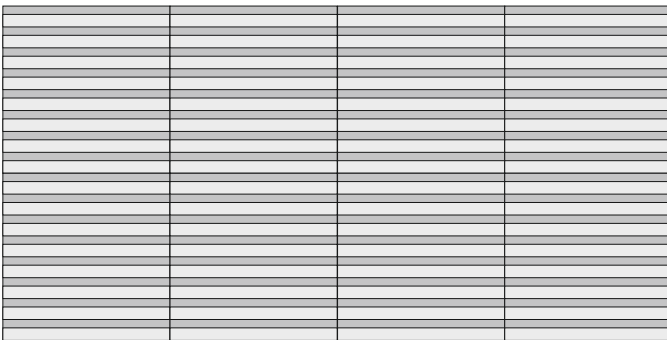


SL60_PrintWide_GreyOak




8 PIECES

K_PW03_GO

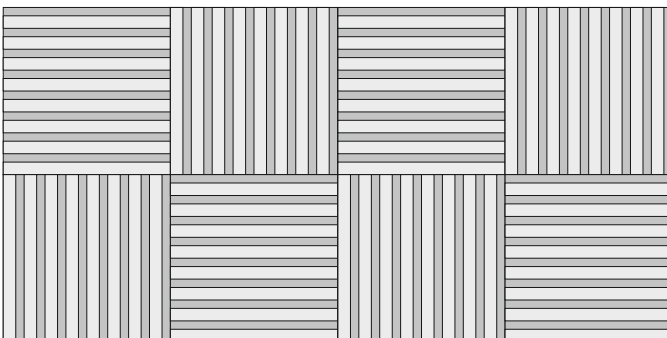


SL60_PrintWide_GreyOak



8 PIECES

PrintWide

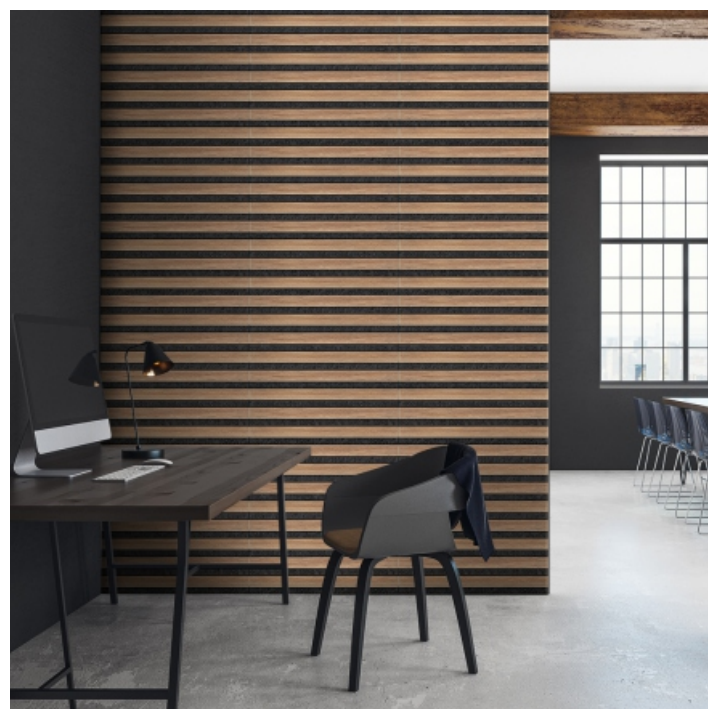

SL60_PrintWide_RusticOak



Base color:



RAVEN BLACK

Color of slats:



RUSTIC OAK


PrintWide

Composition:	100% poliester (at least 50% recycled)
Cutting method:	V-cut at 22.5 degrees
Edge:	V-cut at 22.5 degrees
Dimension:	600 x 600 mm
Thickness:	9 mm
Density:	1900 g/m ²


Sound absorption class:	PN-EN PN-EN ISO11654 $\alpha_w = 0,85$ Class B
Fire classification:	B-s1, d0 non-flammable
Color scheme:	UV print
Mounting method:	Wall mounting - adhesive mounting
Minimum logistics:	8 panels
Unit packaging:	Cardboard box with dimensions 600 x 660 x 80 mm.

Sample compositions PrintWide RusticOak:

K_PW01_RO

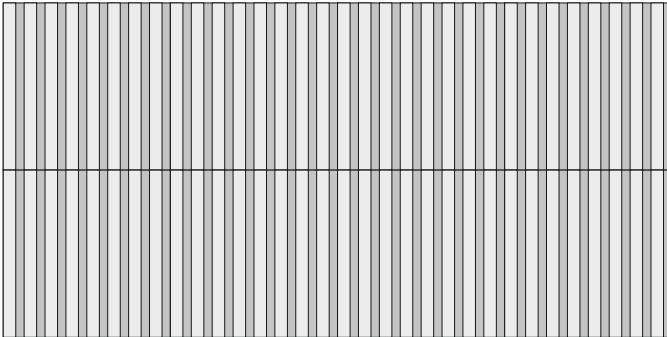


SL60_PrintWide_RusticOak




8 PIECES

K_WP02_RO

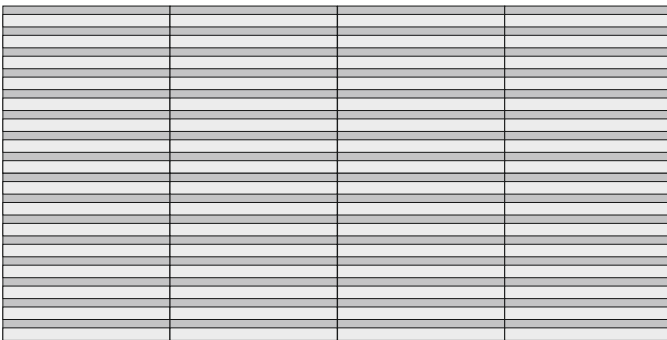


SL60_PrintWide_RusticOak




8 PIECES

K_PW03_RO

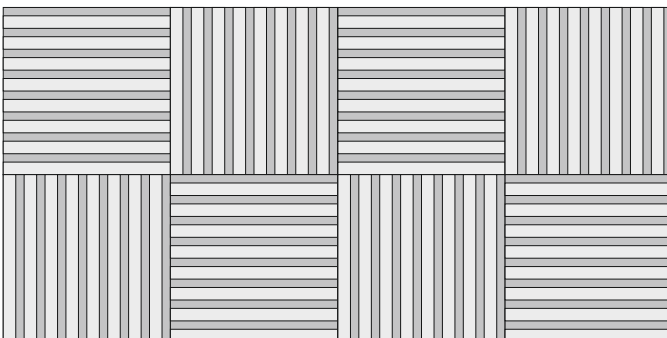

SL60_PrintWide_RusticOak



8 PIECES

PrintWide



SL60_PrintWide_VintageOak



Base color:



RAVEN BLACK

Color of slats:



VINTAGE OAK


PrintWide

Composition:	100% poliester (at least 50% recycled)
Cutting method:	V-cut at 22.5 degrees
Edge:	V-cut at 22.5 degrees
Dimension:	600 x 600 mm
Thickness:	9 mm
Density:	1900 g/m ²


Sound absorption class:	PN-EN PN-EN ISO11654 $\alpha_w = 0,85$ Class B
Fire classification:	B-s1, d0 non-flammable
Color scheme:	UV print
Mounting method:	Wall mounting - adhesive mounting
Minimum logistics:	8 panels
Unit packaging:	Cardboard box with dimensions 600 x 660 x 80 mm.

Sample compositions PrintWide VintageOak:

K_PW01_VO

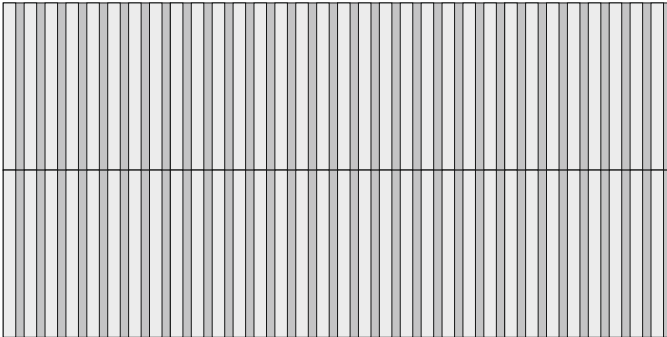


SL60_PrintWide_VintageOak




8 PIECES

K_WP02_VO

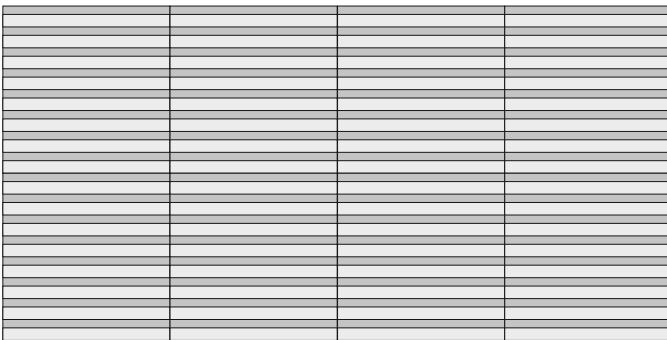


SL60_PrintWide_VintageOak




8 PIECES

K_PW03_VO

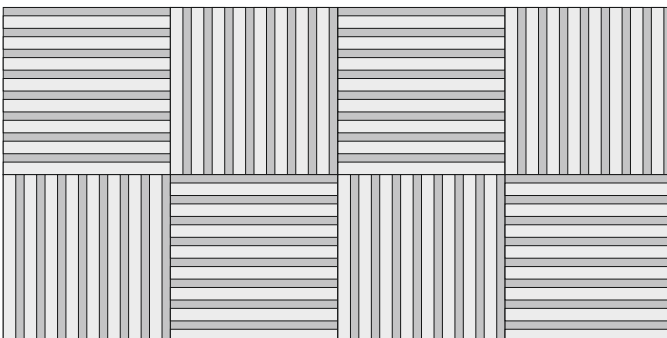

SL60_PrintWide_VintageOak









8 PIECES

price list

PrintSlim	Product code	net price/pcs
	SL60_PrintSlim_GreyOak	€38
Composition	K_PS01_G0	€304
Composition	K_PS02_G0	€304
Composition	K_PS03_G0	€304
	SL60_PrintSlim_RusticOak	€41
Composition	K_PS01_R0	€328
Composition	K_PS02_R0	€328
Composition	K_PS03_R0	€328
	SL60_PrintSlim_VintageOak	€41
Composition	K_PS01_V0	€328
Composition	K_PS02_V0	€328
Composition	K_PS03_V0	€328

PrintEdge	Product code	net price/pcs
	SL60_PrintEdge_D_GreyOak	€38
	SL60_PrintEdge_G_GreyOak	€38
Composition	K_PS01_GO	€304
Composition	K_PS02_GO	€304
Composition	K_PS03_GO	€304
	SL60_PrintEdge_D_RusticOak	€41
	SL60_PrintEdge_G_RusticOak	€41
Composition	K_PS01_RO	€328
Composition	K_PS02_RO	€328
Composition	K_PS03_RO	€328
	SL60_PrintEdge_D_VintageOak	€41
	SL60_PrintEdge_G_VintageOak	€41
Composition	K_PS01_VO	€328
Composition	K_PS02_VO	€328
Composition	K_PS03_VO	€328

PrintShort	Product code	net price/pcs
	SL60_PrintShort_L_GreyOak	€38
	SL60_PrintShort_R_GreyOak	€38
Composition	K_PSH01_GO	€304
Composition	K_PSH02_GO	€304
Composition	K_PSH03_GO	€304
	SL60_PrintShort_L_RusticOak	€41
	SL60_PrintShort_R_RusticOak	€41
Composition	K_PSH01_RO	€328
Composition	K_PSH02_RO	€328
Composition	K_PSH03_RO	€328
	SL60_PrintShort_L_VintageOak	€41
	SL60_PrintShort_R_VintageOak	€41
Composition	K_PSH01_VO	€328
Composition	K_PSH02_VO	€328
Composition	K_PSH03_VO	€328

PrintWide	Product code	net price/pcs
	SL60_PrintWide_GreyOak	€38
Composition	K_PW01_GO	€304
Composition	K_PW02_GO	€304
Composition	K_PW03_GO	€304
	SL60_PrintWide_RusticOak	€41
Composition	K_PW01_RO	€328
Composition	K_PW02_RO	€328
Composition	K_PW03_RO	€328
	SL60_PrintWide_VintageOak	€41
Composition	K_PW01_VO	€328
Composition	K_PW02_VO	€328
Composition	K_PW03_VO	€328

Product	net price/pcs
Adhesive FixALL Turbo 290 ml	€7,5

price list valid from 01/09/2023/4,5

Shipping

Individual packaging with dimensions of 600 x 660 x 80 mm can accommodate 8 panels and 1 unit of mounting adhesive. The estimated weight of the set is approximately 6 kg. The shipping cost is calculated individually for each country. The shipping cost for non-standard quantities of panels is always calculated individually.

Lead time

7-14 business days, depending on the availability of materials in stock.
Ask your distributor for material and color availability.

